


# Technical summary

## Quick and simple to install



**Interlocking** – one row of fasteners per module for fast assembly

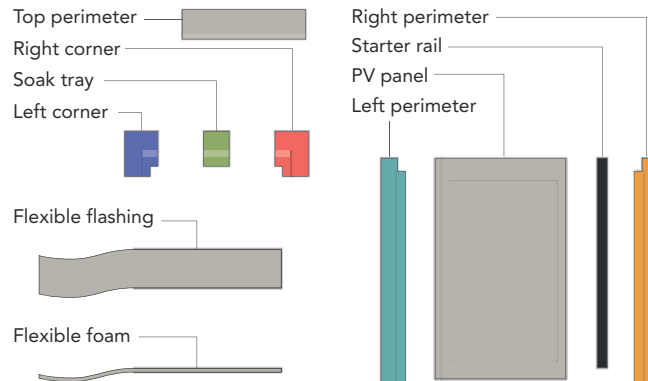

**8 main components** – simple installation




**No sub frame** – module installs straight onto battens

## Installation made easy



Video




Install guide




Quickstart guide

## Certifications and warranty

Electrical	IEC 61215 IEC 61730 100% EL tested
Weather resistance	PD/CEN TR 15601 - Pitch 25° - 60°
Fire resistance	EN 13501-5 CEN/TS 1187 (t1), (t3) & (t4) BS476-3, AA rating
Wind resistance	EN 14437 - 5 battens (50 x 25mm): 3181Pa - 7 battens (50 x 25mm): 4072Pa - 5 battens (38 x 25mm): 3606Pa
Hail resistance	Classification HW4 (certified to withstand a larger 40mm diameter hail impact over the standard requirement of 25mm)
Tile compatibility	Interlocking thick leading edge Interlocking thin leading edge Interlocking profiled tile Interlocking plain tile Interlocking pantile Non-interlocking pantile Plain tile Natural and synthetic slate For other tile types please contact us.
Fully MCS certified	
Warranty	10 year product warranty 25 year linear power warranty

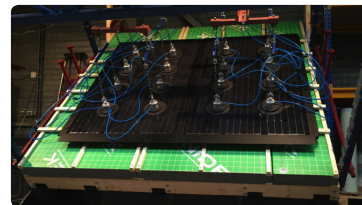

Tested for the highest wind zones

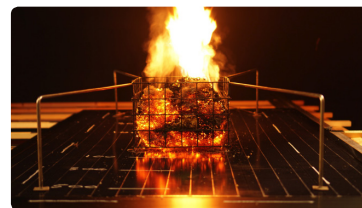

Comprehensively fire tested



Tested to meet the same high standards as the tiles it replaces



MCS PV0020/17

